



TERMINALS ARRANGEMENT




ACCORDING TO:
ISO 7588-1 (TERMINAL ASSIGNMENT)
ISO 8092-1 (BLADE TERMINAL 6,3 mm x 0,8 mm)

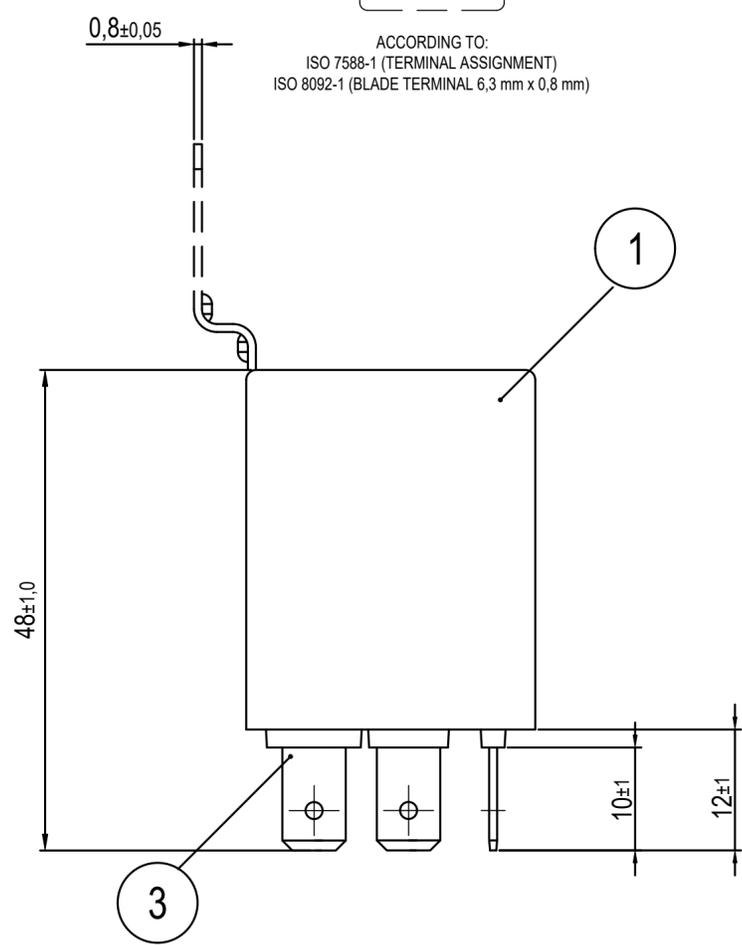


CHARACTERISTICS	
RATED VOLTAGE	24V DC
OPERATING VOLTAGE	(18 + 30)V DC
RATED LOAD	3+1(8) x 21W
OPERATING TEMPERATURE	-40°C + 85°C
DUTY CYCLE	(50±3)%
FLASHING FREQUENCY	85 ± 15 CPM (DIAGNOSTIC NOT PRESENT)
DIAGNOSTIC	DOUBLE FLASHING FREQUENCY: 170 ± 30 CPM
LIFETIME TEST	200h @ HAZARD LOAD @ 26V @ 23 °C
MECHANICAL LIFETIME	1.000.000 OPERATIONS
IN CONFORMITY WITH	ECE R10
IP PROTECTION	IP54

MATERIALS					
N.	Description	Material	Treatment	Color	Note
1	HOUSING	PA 66 GF30	-	BLACK	-
2	BASEPLATE	PA 66 GF30	-	BLACK	-
3	TERMINAL	CuZn37	Sn 5µm	GREY	-
4	BRACKET	EN 10130 DC01	LANTHANE MIN 7 µm	GREY	PROVIDED DETACHED

WIRING DIAGRAM

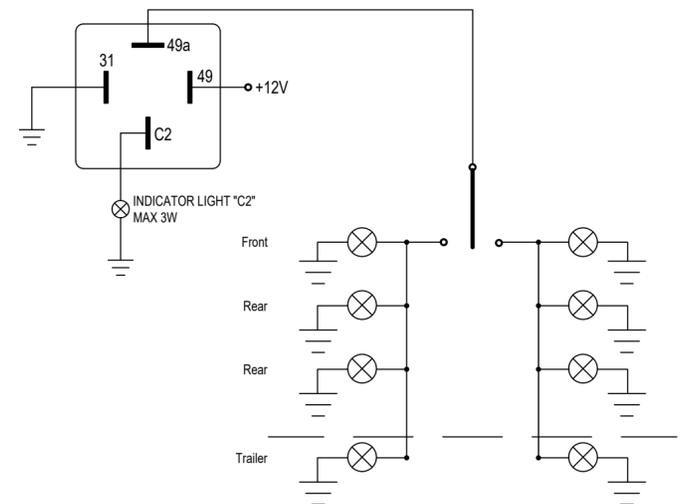

WORKING DIAGRAM

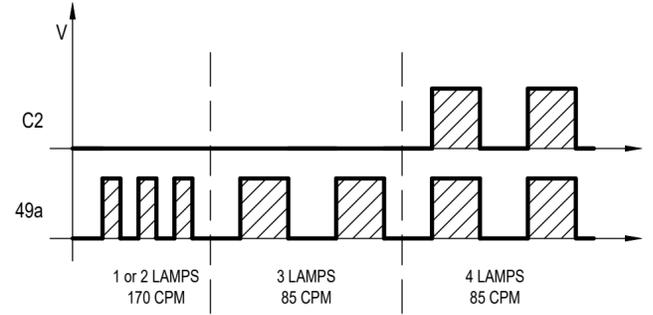

REVISIONS			
REV.	DESCRIPTION	COORDINATES	DATE
1			
2			
3			

GENERAL TOLERANCES ACCORDING TO ISO 2768-mH

ALL PROPRIETARY RIGHTS RESERVED. THE COMPANY ASSERTS ONE'S RIGHTS ACCORDING TO THE LAW.
THIS DRAWING SHALL NOT BE REPRODUCED OR IN ANY WAY UTILIZED TO MAKE COMPONENTS
AND IT MUST NOT BE RELEASED TO OTHER PARTIES WITHOUT WRITTEN CONSENT.

HERTH+BUSS	TITLE	WEIGHT	SCALE
	FLASHER 24V 4P 3+1(8)x21W	32 g	1 : 1
	PART NUMBER	REV.	SIZE
75605179	0	A2	SHEET
			1 / 1